

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number
WO 2004/008581 A1

(51) International Patent Classification⁷: **H01R 13/62**,
24/02, 33/20

(21) International Application Number:
PCT/GB2003/003080

(22) International Filing Date: 16 July 2003 (16.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0216448.1 16 July 2002 (16.07.2002) GB

(71) Applicant and

(72) Inventor: **MCLEISH, Graham** [GB/GB]; Woolmill
Croft, Ardlethen, Ellon AB41 8JE (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(74) Agent: **MURGITROYD & COMPANY**; Scotland
House, 165-169 Scotland Street, Glasgow G5 8QA (GB).

Published:

— with international search report

[Continued on next page]

(54) Title: CONNECTOR

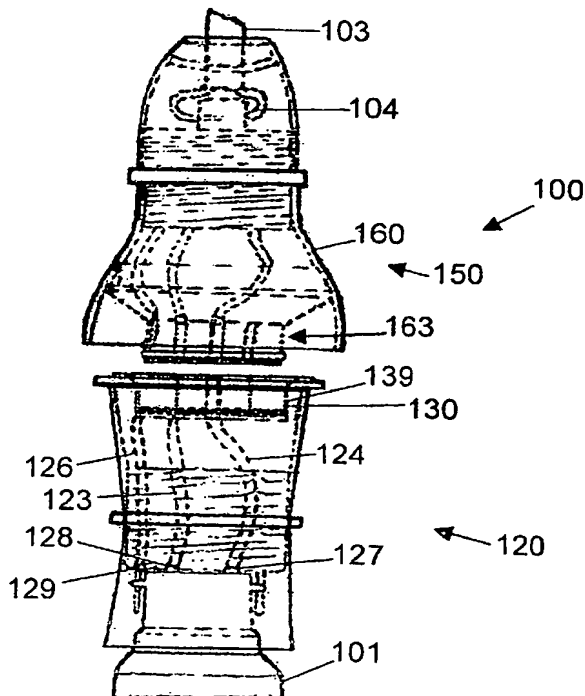

(57) Abstract: An electrical connector (100) comprising a male (120) and female (150) part, each part (120, 150) having a magnet (135, 165) adapted to attract the parts (120, 150) together to make a connection. The parts (120, 150) can connect at any relative rotational orientation and preferred embodiments prevent offset connection between the magnets (135, 165) or parts (120, 150). The connector (100) is particularly suited for use in out of reach locations, for example to easily and safely replace light bulbs into sockets suspended from a ceiling.